



# A SERIES



- 4800 to 8200 litres per hour
- Robust anti-corrosive construction
- Engineered for intermittent or continuous duty
- Submersible in both fresh and sea water
- Emptying cellar or pools can intake water from the base
- Adopts high quality resin to seal the winding for safe use
- Application includes, flood removal, pond emptying and aeration

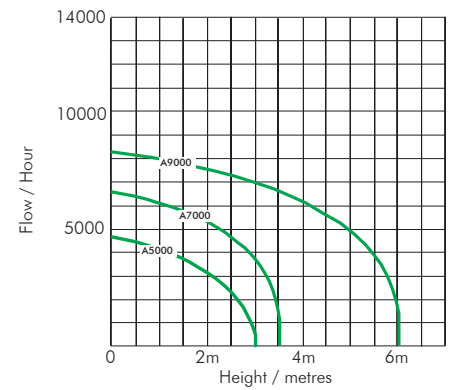

## IDEAL FOR

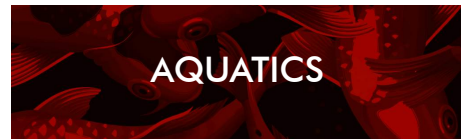

MODEL	FLOW (Max)	HEIGHT (Max)	POWER	CONNECTOR
<b>A5000</b>	4800 l/hour	3.0m	94W	1, 1¼"
<b>A7000</b>	6500 l/hour	3.5m	120W	1, 1¼"
<b>A9000</b>	8200 l/hour	6.0m	250W	1, 1¼"

