




CP SERIES



- 60 litres per minute.
- Variable flow control
- Oil free design ensures contamination free air
- Battery will charge when the pump is connected with AC power supply
- Changes automatically to DC when AC is off
- The DC power can work up to 8 hours
- Maintenance-free 12V battery inside

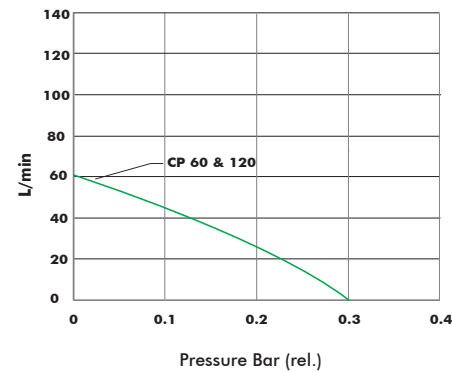

FEATURES



Air Outlet



Air Regulator Control

IDEAL FOR



HYDROPONICS



AQUATICS

MODEL	FLOW (Max)	PRESSURE (Max)	CONNECTOR	POWER	DIMENSIONS
CP60	60 l/min	0.3 bar	8mm	30W	294 x 202 x 181mm
CP120 x2 OUTLETS	60 l/min (x2)	0.3 bar	8mm	28W	342 x 225 x 202mm

