

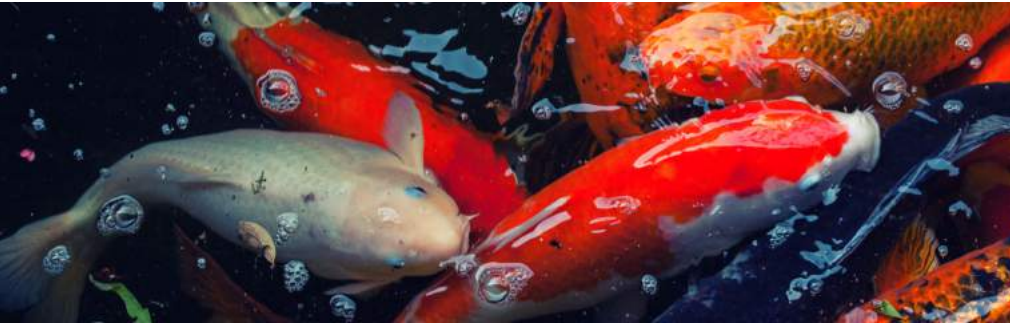



DS SERIES

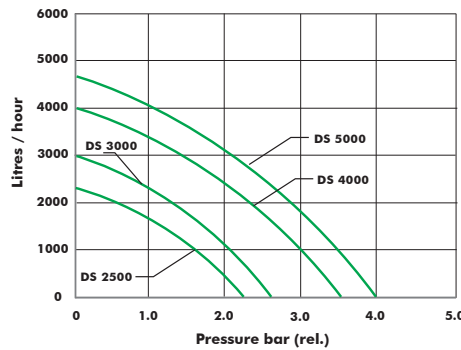

- Suitable for submersible or external use
- Low power consumption and high efficiency
- Can remove all water from tanks due to its bottom intake

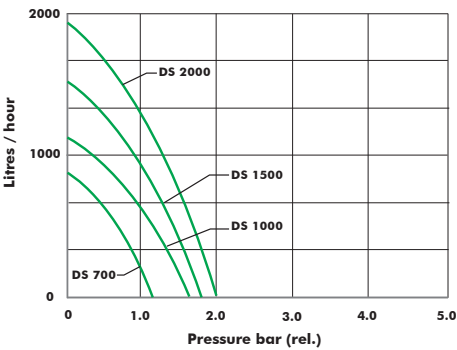

IDEAL FOR

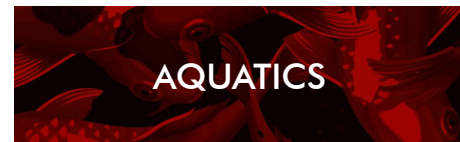

MODEL	FLOW (Max)	HEIGHT (Max)	POWER	OUTLET	DIMENSIONS
DS700	850 l/hour	1.1m	9W	19mm	91.5 x 57 x 108mm
DS1000	1290 l/hour	1.7m	20W	19mm	91.5 x 57 x 108mm
DS1500	1650 l/hour	1.8m	27W	19mm	118 x 69 x 126.5mm
DS2000/F	1920 l/hour	2.0m	30W	19mm	118 x 69 x 126.5mm
DS2500	2400 l/hour	2.3m	45W	19mm	118 x 69 x 126.5mm
DS3000	3000 l/hour	2.6m	60W	19mm	114 x 85.5 x 140mm
DS4000	4000 l/hour	3.5m	80W	25mm	114 x 85.5 x 140mm
DS5000	4800 l/hour	4.0m	105W	25mm	114 x 85.5 x 140mm

