



# enviro® ET SERIES PRO



- 30 to 500 litres per minute
- Robust and compact construction - weatherproof
- Green drive technology - energy efficient motors low power consumption
- Ideal for large grow systems and koi ponds
- Supplied with a brass fitting and L shaped elbow

**2**  
YEAR  
WARRANTY



MODEL	FLOW @ PRESSURE	CONNECTOR	POWER	DIMENSIONS
<b>ET 30</b>	30 l/min @ 0.12 bar	14mm	25W	208 x 150 x 178mm
<b>ET 40</b>	40 l/min @ 0.12 bar	14mm	30W	218 x 156 x 182mm
<b>ET 60</b>	60 l/min @ 0.12 bar	18mm	55W	203 x 165 x 153mm
<b>ET 80</b>	80 l/min @ 0.10 bar	18mm	85W	210 x 185 x 171mm
<b>ET 100</b>	100 l/min @ 0.10 bar	18mm	105W	238 x 196 x 177mm
<b>ET 120</b>	120 l/min @ 0.20 bar	18mm	125W	265 x 215 x 198mm
<b>ET 150</b>	150 l/min @ 0.20 bar	18mm	130W	256 x 200 x 222mm
<b>ET 200</b>	200 l/min @ 0.20 bar	18mm	195W	256 x 200 x 222mm
<b>ET 250</b>	250 l/min @ 0.20 bar	26mm	220W	349 x 231 x 219mm
<b>ET 300</b>	300 l/min @ 0.20 bar	26mm	275W	349 x 231 x 219mm
<b>ET 400</b>	400 l/min @ 0.20 bar	26mm	220W	349 x 231 x 219mm
<b>ET 500</b>	500 l/min @ 0.20 bar	26mm	275W	349 x 231 x 219mm





**SERVICE KITS:**

MODEL	DIAPHRAGM	FILTER	OTHER
<b>ET 30 - 120</b>	2	1	1 Magnet
<b>ET 150 - 200</b>	2	1	8 Valves
<b>ET 250 - 300</b>	4	1	16 Valves
<b>ET 400 - 500</b>	4	1	16 Valves

**IDEAL FOR**





**HYDROPONICS**



**AQUATICS**

At Charles Austen we recommend enviro® pumps are serviced every 18 months, service kits for each pump can be purchased from us. Sign up to our service reminder and we'll remind you when it is due!

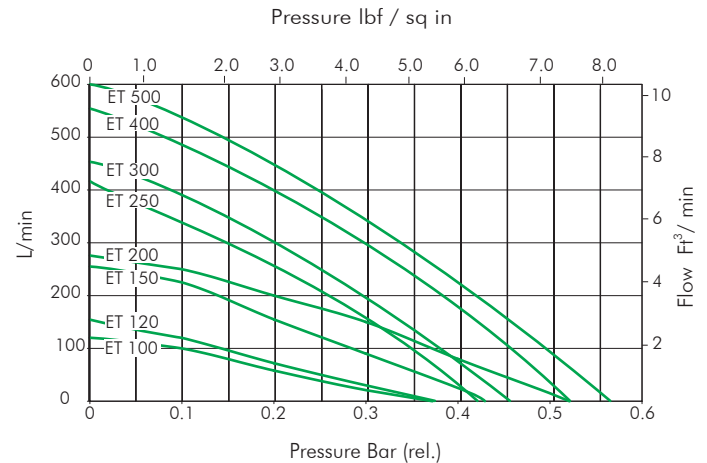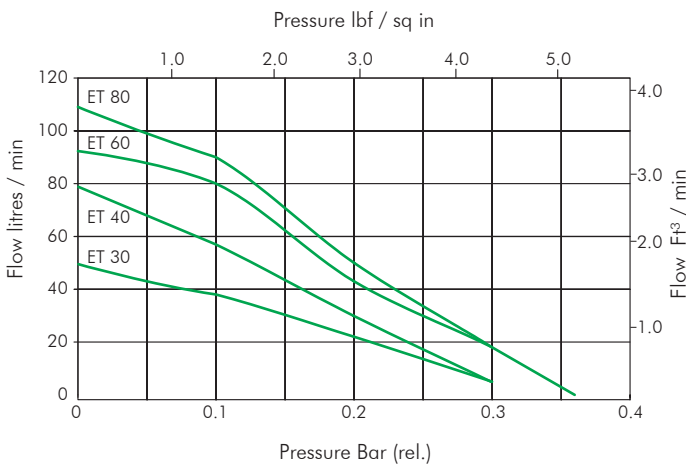

**CONNECTIONS**

**ET40** - Plain, horizontal, connection 14.0mm OD also supplied with screw barbed connector 10.0mm OD

**ET60, ET80, ET100, ET120** - Plain, horizontal, connection 18.0mm OD also supplied with screw in barbed connector 12.0mm OD

**ET150 - ET500** - Plain, horizontal, connection 18.0mm OD

**ACCESSORIES**

Elbow connector (included)

Large brass barbed connector 18.0mm and 20.0mm (optional)

Please note - it is important that you ensure the motor specification stated and the range of materials offered in the pump are compatible with the performance, environmental limitations and chemical resistance requirements of the application. For further information or details of our extensive range of pumps, contact our technical sales office who will be pleased to help you select the most suitable pump for your application.