


HX 88 MINI SERIES



- 300 to 650 litres per hour
- Low power consumption and high efficiency
- Water flow regulator to adjust water flow
- Rotor assembly is easy to remove
- All of the HX 88 series are submersible and can be mounted in any orientation
- Applications include water features, rock pools and waterfalls

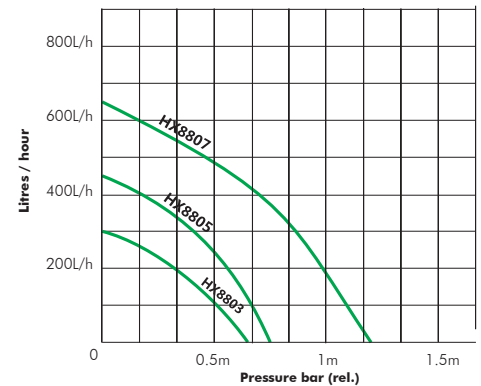

IDEAL FOR

AQUATICS

MODEL	FLOW (Max)	HEIGHT (Max)	CONNECTOR	POWER	DIMENSIONS
HX8803	300 l/hour	0.65m	10mm	5W	54 x 47 x 52mm
HX8805	450 l/hour	0.75m	10mm	6W	54 x 47 x 52mm
HX8807	650 l/hour	1.2m	14mm	8W	83 x 55 x 58mm

