



HX SERIES

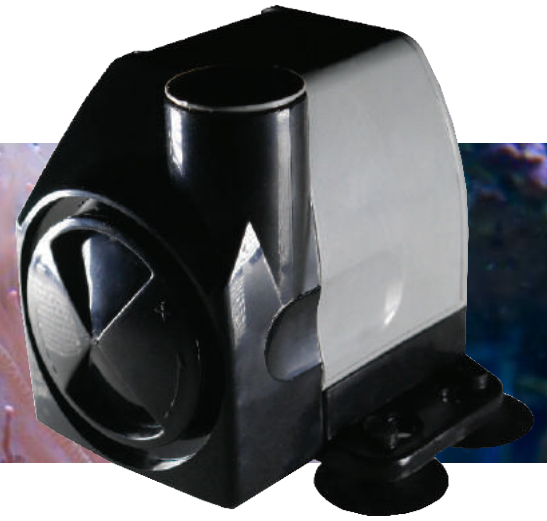

- 285 to 2000 litres per hour
- Compact construction for use in tanks and water features, can be mounted in any orientation
- Rubber suction mounting feet for ease of installation in glass systems
- Flow regulator
- Ideal for pumping nutrients in NFT/ flood and drain applications

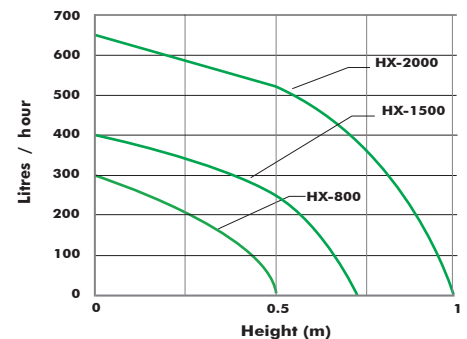

IDEAL FOR

AQUATICS

MODEL	FLOW (Max)	HEIGHT (Max)	CONNECTOR	POWER	DIMENSIONS
HX800	285 l/hour	0.5m	9mm	3W	55 x 65 x 80mm
HX1500	400 l/hour	0.7m	12mm	5W	63 x 73 x 83mm
HX2000	650 l/hour	1.0m	14.5mm	10W	90 x 73 x 110mm
HX2500	650 l/hour	1.3m	14.5mm	12W	112 x 95 x 105mm
HX4500	2000 l/hour	2.8m	20mm	36W	150 x 135 x 120mm

