


L SERIES



- 12000 to 25000 litres per hour
- Ideal for use in dirty water with particle sizes up to 6mm
- Overload protection by means of a thermal overload tip
- All the electrical parts are fully encapsulated in synthetic resin

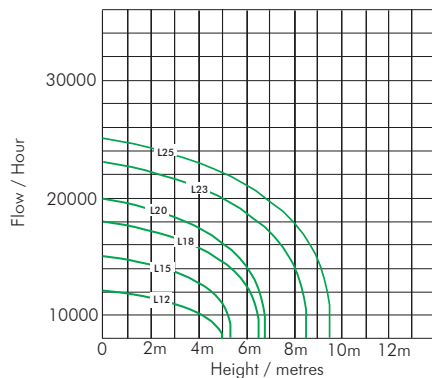

IDEAL FOR



MODEL	FLOW (Max)	HEIGHT (Max)	WEIGHT	POWER	DIMENSIONS
L12	12000 l/hour	5.0m	4.7kg	160W	201×201×273mm
L15	15000 l/hour	5.4m	5.1kg	265W	201×201×273mm
L18	18000 l/hour	6.5m	5.7kg	325W	201×201×288mm
L20	20000 l/hour	6.7m	5.7kg	400W	201×201×288mm
L23	23000 l/hour	8.5m	6.0kg	520W	201×201×303mm
L25	25000 l/hour	9.5m	6.5kg	620W	201×201×303mm

