





LD/ACO 22 SERIES



- 1.3 to 30 litres per minute
- Low cost series for continuous or intermittent duty
- Multiple outlet options eliminate the need for manifolds
- Intergrated rubber feet reduce vibration and keep noise levels minimal
- Ideal for single or multi pot hydroponics systems or small fish tanks



IDEAL FOR

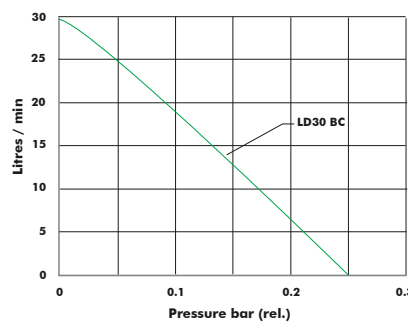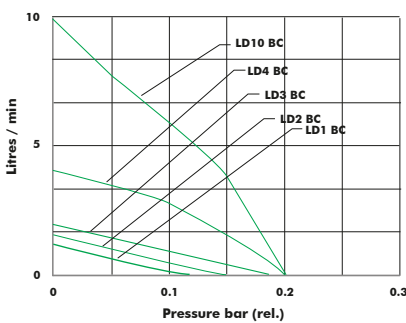

MODEL	FLOW (Max)	PRESSURE (Max)	CONNECTOR	POWER	DIMENSIONS
LD1 BC/ACO2201	1.3 l/min	0.12 bar	4mm	1.8W	88 x 60 x 53mm
LD2 BC/ACO2202	1.6 l/min	0.15 bar	4mm	2W	110 x 68 x 63mm
LD3 BC/ACO2203	2 l/min	0.18 bar	4mm	2.5W	140 x 145 x 95mm
LD4 BC/ACO2204 (2 Outlets)	4 l/min	0.20 bar	4mm	4W	156 x 95 x 75mm
LD10 BC/ACO2206 (4 Outlets)	10 l/min	0.20 bar	4mm	8W	188 x 120 x 100mm
LD30 BC/ACO2208	30 l/min	0.25 bar	4mm	25W	221 x 156 x 125mm

