

# RP120V/P SERIES

OIL FREE - ROCKING PISTON PUMP

### **PERFORMANCE**

• 70.0 - 100 Litres/ Min Flow

#### **RP120V**



#### **RP120P**



## **APPLICATIONS**


- VACUUM HOLD
- ANAESTHESIA GAS **RECOVERY**
- FILM PROCESSING
- AUTOCLAVES
- PORTABLE OXYGEN **UNITS**

- Oil free Rocking Piston pump.
- The RP120 has a high vacuum or high pressure performance.
- Ultra long life due to its robust design.
- Perfect for continuous duty applications.

#### **IDEAL FOR**



# **PERFORMANCE**



# **PUMP MATERIALS**

COMPONENT	MATERIAL
SEAL	PTFE
CYLINDER	ANODISED ALUMINUM










# RP120V/P SERIES OIL FREE - ROCKING PISTON PUMP

# **DIMENSIONS (MM)**

## RP120V - 8.4 KG








#### **POWER & NOISE**


MODEL	WATTS	NOISE
RP120V (SERIES)	380W	56 dBA
RP120V (PARALLEL)	360W	56 dBA
RP120P	360W	56 dBA


#### **PERFORMANCE**


MODEL	MAX FLOW (L/MIN)	MAX VAC mbar (abs)	MAX PRESSURE (bar)
RP120V (SERIES)	70.0	27.0	-
RP120V (PARALLEL)	100.0	80.0	-
RP120P	85.0	-	7.0

### RP120P - 8.4 KG







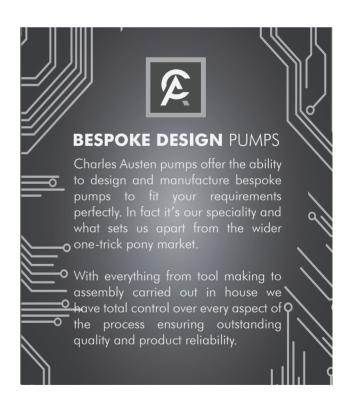

Please note - it is important that you ensure the motor specification stated and the range of materials offered in the pump are compatible with the performance, environmental limitations and chemical resistance requirements of the application. For further information or details of our extensive range of pumps, contact our technical sales office who will be pleased to help you select the most suitable pump for your application.





