

T SERIES PRO (POND PUMP)



- High quality aluminium and ceramic shaft ensure long life even in continuous duty
- Vortex impeller
- Exceptionally high flow
- Synchronous motor with thermal overload protection
- Ideal for pond aeration, filter systems or water features





2
YEAR
WARRANTY



MODEL	FLOW (Max)	HEIGHT (Max)	OUTLET (Options)	POWER	DIMENSIONS
T4000	3600 l/hour	2.2m	1, 1¼, 1½"	55W	359 x 135 x 162mm
T4800	4800 l/hour	2.5m	1, 1¼, 1½"	67W	359 x 135 x 162mm
T6000	6100 l/hour	2.5m	1, 1¼, 1½"	65W	359 x 135 x 162mm
T8000	7800 l/hour	4.0m	1, 1¼, 1½"	93W	359 x 135 x 162mm
T9000	9500 l/hour	3.8m	1, 1¼, 1½"	105W	359 x 135 x 162mm
T10000	10000 l/hour	4.2m	1, 1¼, 1½"	147W	359 x 135 x 162mm
T12000	11300 l/hour	4.5m	1, 1¼, 1½"	165W	359 x 135 x 162mm
T15000	15200 l/hour	5.5m	1½, 2"	215W	359 x 135 x 162mm
T18000	17350 l/hour	6.1m	1½, 2"	285W	402 x 165 x 189mm
T20000	19100 l/hour	6.3m	1½, 2"	278W	402 x 165 x 189mm
T23000	23000 l/hour	8.5m	1½, 2"	520W	402 x 165 x 189mm
T25000	25000 l/hour	9.5m	1½, 2"	593W	402 x 165 x 189mm

T SERIES PRO (POND PUMP)

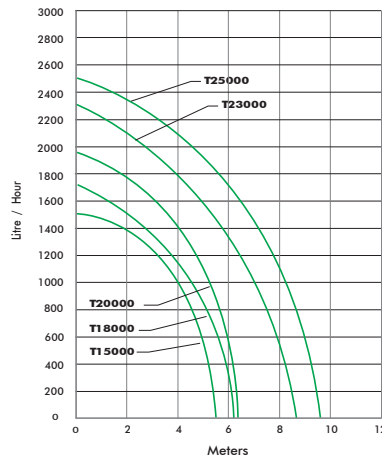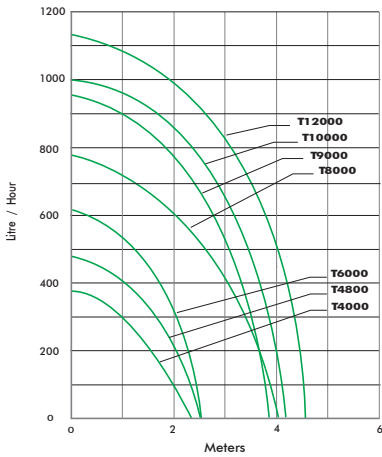

IDEAL FOR



Option 1:

Filter cover can be removed for in-line connection to skimmers, filters and water features

CONNECTIONS

OPTIONS: 1", 1 1/4", 1 1/2", OD.
Supplied with 10 metre lead and plug.



Option 2:

Pump setup for submersible use in pond aeration



Option 3:

Pump setup for submersible use. Includes ball for connecting tubing. Ideal for waterfalls

